




RT650-OLP  
Patent No. 7,150,425

Made in USA

### Medium Duty Spring Retractable Reels Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

Series RT is an economical choice for a medium duty, lighter weight, spring-driven hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use. The industrial-grade drive spring is protected from the environment in a polypropylene spool for longer service life. Guide arm adjusts to seven positions.

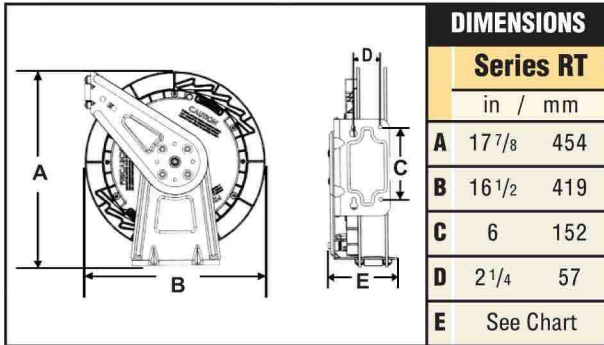

**NEW!**  
Nitrogen Reels  
RT650-OLPG-GN205



**NEW!**  
Side-Mount Reels  
RT650-OLPSM

MODELS WITH HOSE				HOSE CAPACITY				MODELS WITHOUT HOSE				
MODEL	WEIGHT	PRESSURE	I.D.	O.D.	(M)NPTF OUTLET	(F)NPTF INLET	LENGTH	MODEL	WEIGHT	PRESSURE	E	
	lbs / kg	psi / bar							in / mm	in / mm		in
<b>LOW PRESSURE AIR/WATER REELS</b> Maximum Temperature 150° F (65° C)												
RT425-OLP	21 10	300 21	1/4 6	.500 13	1/4	3/8	25 8	RT402-OLP	19 9	300 21	5 1/2 140	
RT435-OLP	22 10	300 21	1/4 6	.500 13	1/4	3/8	35 11	RT403-OLP	19 9	300 21	5 1/2 140	
RT450-OLP	25 11	300 21	1/4 6	.500 13	1/4	3/8	50 15	RT405-OLP	21 10	300 21	5 1/2 140	
RT465-OLP	27 12	300 21	1/4 6	.500 13	1/4	3/8	65 20	-----	--- ---	---	---	
RT625-OLP	22 10	300 21	3/8 10	.640 16	1/4	3/8	25 8	RT602-OLP	19 9	300 21	5 1/2 140	
RT635-OLP	23 10	300 21	3/8 10	.640 16	1/4	3/8	35 11	RT603-OLP	19 9	300 21	5 1/2 140	
RT650-OLP	29 13	300 21	3/8 10	.640 16	1/4	1/2	50 15	RT605-OLP	23 10	300 21	6 1/4 159	
RT825-OLP	28 13	300 21	1/2 13	.781 20	1/2	1/2	25 8	RT802-OLP	23 10	300 21	6 1/4 159	
RT835-OLP	30 14	300 21	1/2 13	.781 20	1/2	1/2	35 11	RT803-OLP	23 10	300 21	6 1/4 159	
RT850-OLP	35 16	300 21	1/2 13	.781 20	1/2	1/2	50 15	RT805-OLP	25 11	300 21	7 3/4 197	
<b>MEDIUM PRESSURE OIL REELS</b> Maximum Temperature 150° F (65° C)												
RT625-OMP	27 12	1000 69	3/8 10	.640 16	3/8	3/8	25 8	RT602-OMP	22 10	1000 69	5 1/2 140	
RT635-OMP	30 14	1000 69	3/8 10	.640 16	3/8	3/8	35 11	RT603-OMP	22 10	1000 69	5 1/2 140	
RT650-OMP	35 16	1000 69	3/8 10	.640 16	3/8	1/2	50 15	RT605-OMP	25 11	1000 69	7 3/4 197	
RT825-OMP	31 14	1000 69	1/2 13	.820 21	1/2	3/8	25 8	RT802-OMP	23 10	1000 69	6 1/4 159	
RT835-OMP	33 15	1000 69	1/2 13	.820 21	1/2	1/2	35 11	RT803-OMP	23 10	1000 69	6 1/4 159	
<b>HIGH PRESSURE GREASE REELS</b> Maximum Temperature 150° F (65° C)												
RT425-OHP	28 13	5000 345	1/4 6	.590 15	1/4	3/8	25 8	RT402-OHP	22 10	5000 345	5 1/2 140	
RT435-OHP	31 14	5000 345	1/4 6	.590 15	1/4	3/8	35 11	RT403-OHP	22 10	5000 345	5 1/2 140	
RT625-OHP	30 14	4000 276	3/8 10	.750 19	3/8	3/8	25 8	RT602-OHP	22 10	5000 345	5 1/2 140	
RT635-OHP	34 15	4000 276	3/8 10	.750 19	3/8	1/2	35 11	RT603-OHP	23 10	5000 345	6 1/4 159	
RT650-OHP	39 18	4000 276	3/8 10	.750 19	3/8	1/2	50 15	RT605-OHP	25 11	5000 345	7 3/4 197	

Low pressure hose reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose, suitable for grease applications only.