

Medium Duty, Durable Series S

Spring Retractable Composite Reels Air/Water/Chemical Delivery/Welding - 3/8", 1/2" I.D.

Series S reels are economical, lighter weight, easy to handle and meet the demands of a medium-duty industrial grade reel for continuous operation. Made of corrosion-proof, tough polypropylene, extensive tests have shown it to be highly resistant to the vast majority of acids, alkalis and UV rays. The design protects the hose and allows easy cleaning of both hose and reel. Wall or floor mount.

A unique combination of composites and metals

The tough composite poly-propylene outer case houses solid brass swivel and fluid path, a steel main shaft and high quality spring steel motor.

Corrosion-resistant, durable

The tough composite poly-propylene outer case is UV stabilized and resistant to most acids and alkalis with excellent impact resistance. Suitable for general applications and environments where corrosion is an issue.

Positive latching system

The design of the latching system ensures positive latching in any mounting position.

Unique mounting

The bracket system supplied with the reel allows mounting in any position with the advantage of the swivel feature.

Lighter weight


Pound for pound the S Series offers distinct weight advantages due to the composite case construction.



Arbor Farms Nursery, Fort Wayne, Indiana



SGA3650 OLP

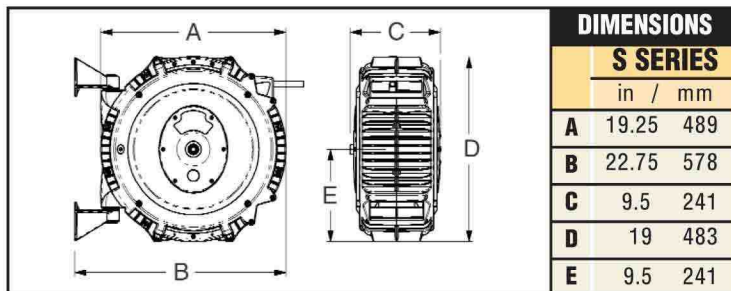

Composite / S Series

- ✓ Combination Air/Water
- ✓ Water Service
- ✓ Hot Water Wash
- ✓ Chemical Delivery
- ✓ Oxygen Acetylene

SPECIFICATIONS

MODEL (with hose)	WEIGHT lbs / kg	PRESSURE psi / bar	I.D. in / mm	O.D. in / mm	LENGTH ft / m	(M)NPTF	(F)NPTF
						HOSE OUTLET in	REEL INLET in
AIR* & WATER* REELS Working Temperature 150° F (65° C).							
SGA3650 OLP	23 10	232 16	3/8 10	.621 16	50 15	3/8	3/8
SGA3665 OLP	27 12	232 16	3/8 10	.621 16	65 20	3/8	3/8
SGA3850 OLP	27 12	232 16	1/2 13	.781 20	50 15	1/2	1/2
WATER REEL Garden-style hose end. Working Temperature 150° F (65° C).							
SWA3850 OLP	27 12	125 9	5/8 16	.750 19	50 15	3/4 NH	1/2
HOT WATER WASH REEL NOTE: Working Temperature 185° F (85° C). Working pressure is related to working temperature.							
SHA3850 OLP	27 12	232 16	1/2 13	.781 20	50 15	1/2	1/2
CHEMICAL DELIVERY REEL							
SCA3850 OLP	27 12	232 16	1/2 13	.781 20	50 15	1/2	1/2
OXYGEN/ACETYLENE REEL Working Temperature 150° F (65° C).							
STW3450 OLP	27 12	300 21	1/4 6	.530 13	50 15	9/16"18(F)LH-RH	9/16"18(F)LH-RH

STW3450 OLP C dimension = 11.25" / 286mm. *NOTE: Air hose can be used for water on these models.

Suitable for all position mounting.

Series S reels are made in Australia.

HoseReelSales.com
813-241-4900



Wind Things Up With Reelcraft™