



Series 30000


# Long Hose Lengths Series 30000

## Heavy Duty Hand Crank and Motor Driven Reels

**Air/Water/Oil** - 1/4", 1/2", 3/4", 1" I.D.

DIMENSIONS AND SPECIFICATIONS						
HOSE I.D.	1/4"	3/8"	1/2"	3/4"	1"	
	(6.35mm)	(9.53mm)	(12.70mm)	(19.05mm)	(25.40mm)	
HOSE O.D.	.530"	.688"	.854"	1.188"	1.380"	
	(13.4mm)	(17.5mm)	(21.5mm)	(30.2mm)	(35.0mm)	
"B" WIDTH	HOSE CAPACITY					
WEIGHT	38 lb	200'	140'	100'	50'	N/A
(18 kg)	(61 m)	(43 m)	(30 m)	(15 m)		
12"	46 lb	425'	300'	200'	100'	N/A
(305 mm)	(21 kg)	(130 m)	(91 m)	(61 m)	(30 m)	
18"	54 lb	625'	450'	325'	175'	100'
(457 mm)	(24 kg)	(191 m)	(137 m)	(99 m)	(54 m)	(31 m)
22"	58 lb	780'	550'	400'	225'	125'
(559 mm)	(27 kg)	(238 m)	(168 m)	(122 m)	(69 m)	(38 m)
27"	66 lb	1000'	700'	500'	275'	150'
(686 mm)	(30 kg)	(305 m)	(213 m)	(152 m)	(84 m)	(46 m)

Reelcraft's Series 30000 reels are designed for rugged, heavy duty applications requiring long lengths of hose and large storage capacity. All-bolted unitized construction with no welds to fatigue, full flow swivel and heavy gauge steel frame, spool and drum ensure longest service life. Series 30000's vibration-proof, self-locking fasteners are ideal for industrial or field use such as turf care or pest control.

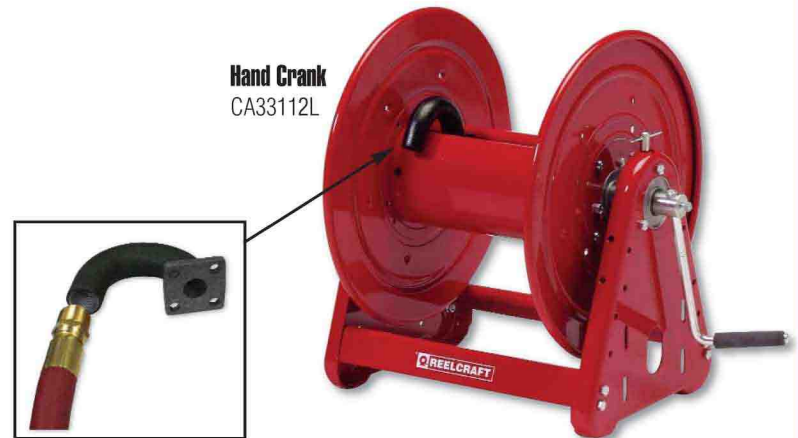

Hand Crank  
CA33112L

**Hose Installation:** The Series 30000 gooseneck is easily removed from the reel for hose attachment. Simply remove the four fasteners attaching gooseneck to reel, connect hose to the gooseneck and re-connect to the reel. NOTE: Do not discard the O-ring; insure that the O-ring is properly fitted into the grooves when replacing the gooseneck.

**Note:** Weights listed are for crank driven - Add for power driven, electric - all explosion proof 45 lb. (20.41 kg); 12 Volt D.C. 1/3 H.P. 30 lb. (13.61 kg); Air 6 AM 36 lb. (16.33 kg). \* Note: capacity chart is reference only.

For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example CA33112 M70.

Made in USA

