

Reelcraft's Engineered Product Solutions

Full Flow Design

The goose neck is contoured to match the drum diameter, which allows smooth hose wrapping and unimpeded flow.

Long Service Life

Swivel incorporates a permanently lubricated ball bearing.

Adjustable Hose Tension

The brake can be adjusted to suit the application requirements.

Trouble-Free Rewinding

Chain and sprocket drive ensures smooth and consistent operation.

Meets or Exceeds Military Vibration for Truck Transport test.

MIL-STD-810F
500,000 mile equivalent

Long Service Life

The spool axial is supported by independent self-aligning bearing.

Free Rotation While Pressurized


The swing joint and spindle allows reel to freely rotate while fluid is pressurized.

Precise Rigid Construction

Proprietary unitized tie rods are zinc plated offering greater strength and resistance to vibration and corrosion.

Ultimate Corrosion Resistance

Individually powder coated components insure maximum coverage and resistance to corrosion. Stainless steel fasteners are standard.

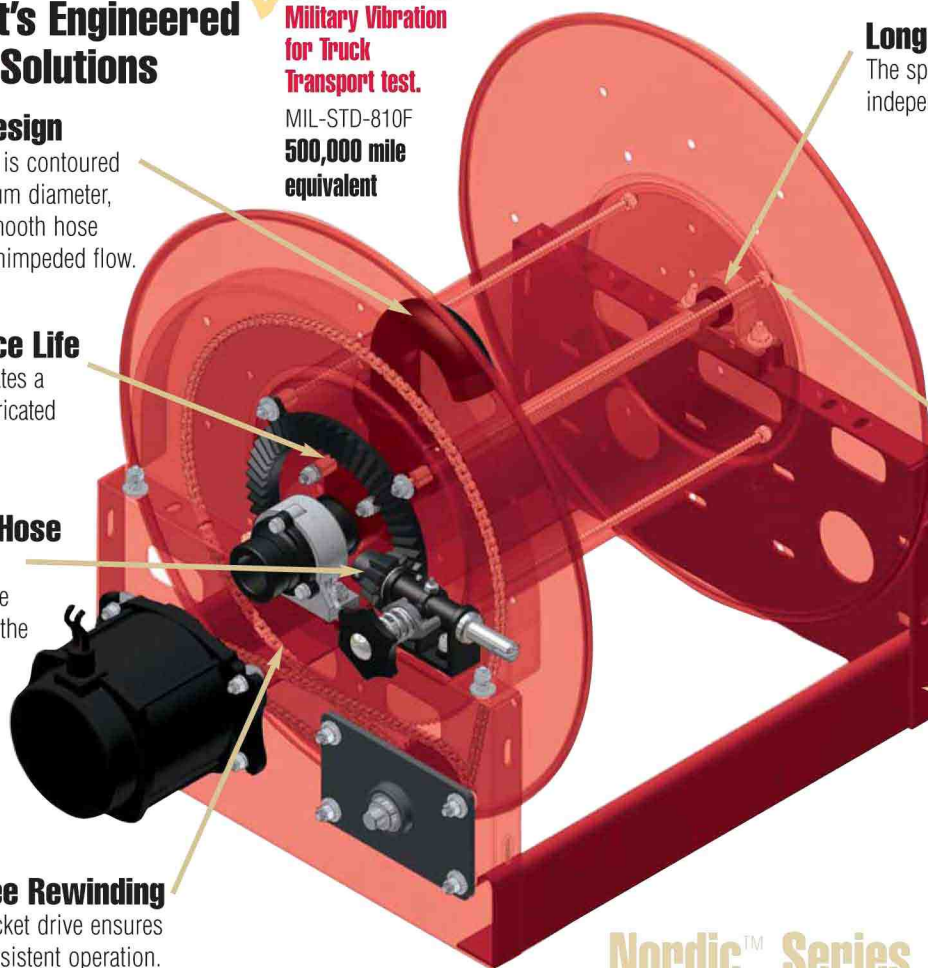

Nordic™ Series

Drive Options	Series	Head Dia.	Drum Length	Thread Size	Thread Type	Thread Style	Fluid Path Material	Pressure	Inlet Style	Fluid Path Location/Direction	Color Code
E 12 VDC	1200	19	6" - 36" in 2" increments	50 1/2"	F Female Outlet	NP NPT	A Aluminum	LP 0-600	1 Straight	1 Left Hand Top Wind	R Red
NJ 24 VDC	2400	21		75 3/4"	FF Female In/Out	BP BSPP	D Ductile Iron	1K 600-1000	2 90 Degree	2 Left Hand Bottom Wind	B Black
EP *12 VDC Exp	3900	23		10 1"	M Male Outlet	BT BSPT	S Stainless	3K 1000-3000	5 1" LPG	3 Right Hand Top Wind	W White
EA *115 VAC Exp	3700	25		12 1 1/4"	MM Male In/Out		B Bronze	5K 3001-5000	6 1 1/2" LPG	4 Right Hand Bottom Wind	G Grey
EJ *24 VDC Exp	5900	28		15 1 1/2"	V Victaulic			6K 5001-6000	7 2" LPG		S Silver
HD Hydraulic		31		20 2"				10K 10,000			
AF 1 1/2 HP Air		36		25 2 1/2"				15K 15,000			
AR 4 HP Air		39		30 3"							
BC Bevel Crank		46		40 4"							
HC Hand Crank											
S Storage											
CR Cable Reel											

Material Options/ Drive Size	Additional Options
1/2" Pitch Chain ###5	Idler
5/8" Pitch Chain ###6	Chain Guard
3/4" Pitch Chain ###7	Roller Bracket (Top)
Gear Driven ###9	Roller Bracket (Bottom)
Alum. Frame/Spool ##5#	Inboard Motor
304 S.S. Frame/Spool ##9#	Brake
316 S.S. Frame/Spool ##8#	Auxiliary Bevel Crank
Sewer Cleaning Reel ##15	Hose Boss (Guide)
Twin Hose ####T	Junction Box
	Explosion Proof Switch
	Solenoid
	Circuit Breaker
	Control Valve

Part No. Example: EP3900-23-28-15FFNPALP21-R00
 EP(12VDC Electric Explosion Proof Motor)
 3900(Series 3900 Hose Reel)
 -23(23" Head Dia.) -28(28" Drum Length)
 -15(1-1/2" Thread Size) FF(Female In/Out Thread Type)
 NP(NPT Thread Style) A(Aluminum Fluid Path)
 LP(0-600 PSI) 2(90° Inlet)
 1(Left Hand Top Wind Fluid Path Location/Direction)
 R(Red)

NOTE: Not all options available in every combination. Please contact manufacturer for price and availability.