

### Heavy Duty Large Frame Reels Nordic™ Series 3900 LPG

1½" or 2" Fluid Path for 1" through 2" I.D. Hose


**Rewind:** Gear-drive or chain and sprocket drive powered by explosion proof A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

**Inlet:** Full Circle® UL approved swivels available in 1", 1½" and 2" as standard.

**Hose Boss™** (optional accessory)

The Hose Boss™ Rewind Assist consists of a rewind switch mounted in an extended arm with two hose rollers. Assists in efficiently and safely unwinding and rewinding hose.

**Now available in polished aluminum**

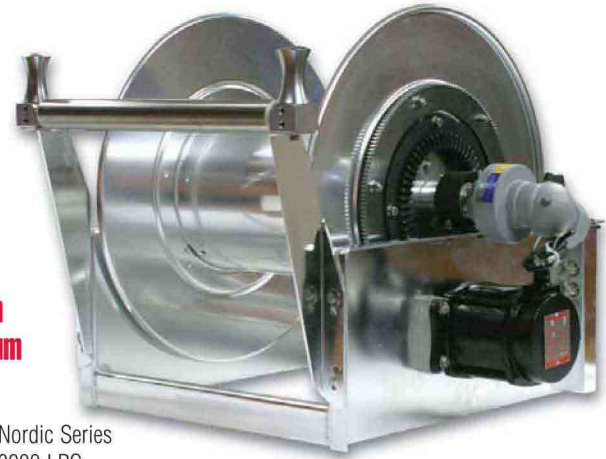


Nordic Series 3900 LPG



**Inset:** Nordic™ Series 3900 LPG with optional Hose Boss™

### Heavy Duty Spring Retractable Reels Series 80000/D80000 - ½", ¾", 1" I.D.



Hose not included

Series 80000 Carbon steel With Full Circle® swivel



Hose Boss™

Made in USA

#### OPTIONS

Choose a reel model from the chart below, then use the suffix codes below to choose a flange/ end plate material.

LP82000 OL□

Flange/End Plate Material	
S	Stainless Steel
P	Carbon Steel

#### SPECIFICATIONS - Refer to chart on page 11 for dimensions.

MODEL	HOSE I.D.		HOSE O.D.		CAPACITY		PRESSURE		WEIGHT		A		B		D		E		F	
	in	mm	in	mm	ft	m	psi	bar	lbs	kg	in	mm	in	mm	in	mm	in	mm	in	mm
SERIES 80000 / D80000: SPRING DRIVEN REELS																				
LP82000 OL□*	1/2	13	.845	21	100	30	300	21	82	37	24	610	25 3/8	645	15	381	10	254	6	152
LP83000 OL□*	3/4	19	1.188	30	50	15	500	35	82	37	24	610	25 3/8	645	15	381	10	254	6	152
LPD83000 OL□*	3/4	19	1.188	30	75	23	500	35	77	35	24	610	25 3/8	645	16 3/8	416	10 1/2	267	7 7/8	200
LPD84000 OL□*	1	25	1.500	38	50	15	500	35	77	35	24	610	25 3/8	645	16 3/8	416	10 1/2	267	7 7/8	200

\*Choose drive type and flange/end plate material from charts above. Refer to page 11 for dimension chart.

HOSE I.D.	in	1	1 1/4	1 1/2	2
	mm	25	32	38	51
HOSE O.D.	in	1.563	1.813	2.063	2.563
	mm	46	46	52	65

#### SPECIFICATIONS - HOSE CAPACITY AND REEL DIMENSIONS Refer to chart on page 29 for Series 3900 LPG dimensions.

MODEL	HOSE LENGTH				Est. Weight	A B C D E F G H														
	ft	m	ft	m		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	
3900-19-20*	ft	75	70	55	103 LB	in	26	20	11.25	21	21	33	22.5	13						
	m	23	21	17	47 KG	mm	660	508	286	533	533	838	572	330						
3900-23-16*	ft	125	90	75	100 LB	in	22	16	11.25	21	23	29	24.5	13						
	m	38	27	23	45 KG	mm	559	406	286	533	584	737	622	330						
3900-23-20*	ft	160	125	100	105 LB	in	26	20	11.25	21	23	33	24.5	13						
	m	49	38	30	48 KG	mm	660	508	286	533	584	838	622	330						
3900-23-24*	ft	200	150	125	110 LB	in	30	24	11.25	21	23	37	24.5	13						
	m	61	46	38	50 KG	mm	762	610	286	533	584	940	622	330						
3900-25-14*	ft	150	100	65	102 LB	in	20	14	11.25	21	25	27	26.5	14						
	m	46	30	20	46 KG	mm	508	356	286	533	635	686	673	356						
3900-25-18*	ft	200	150	80	105 LB	in	24	18	11.25	21	25	31	26.5	14						
	m	61	46	24	48 KG	mm	610	457	286	533	635	787	673	356						
3900-23-26*	ft			90	112 LB	in	32	26	15	21	23	39	24.5	13						
	m			27	51 LG	mm	813	660	381	533	584	991	622	330						
3900-31-12*	ft			90	102 LB	in	18	12	15	24	31	25	32.5	17						
	m			27	46 KG	mm	457	305	381	610	787	635	826	432						
3900-31-22*	ft			185	115 LB	in	28	22	15	24	31	35	32.5	17						
	m			56	52 KG	mm	711	559	381	610	787	889	826	432						

\*Refer to page 26 to build a complete model number including LPG swivel. Refer to charts on page 11 and 29 for